


serie
UR-42



ABRAZADERA DE REPARACIÓN PARA TUBERÍAS DE FUNDICIÓN, ACERO Y FIBROCEMENTO

REPAIR CLAMP FOR CAST IRON, STEEL AND AC PIPES

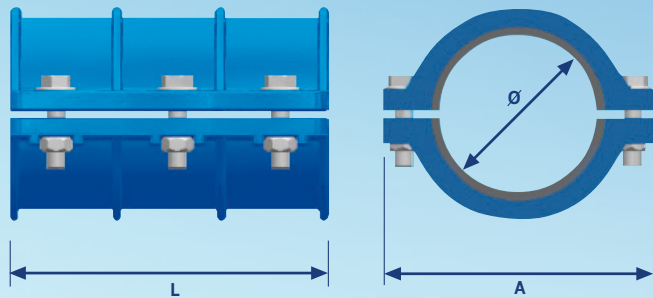

REF.	Ø	Long. abrazadera Clamp length (L)	Anchura Width (A)
UR-42-DN080	88-99	230	224
UR-42-DN100	107-119	230	253
UR-42-DN150	157-171	230	299
UR-42-DN200	219-226	315	360
UR-42-DN250	270-276	315	433
UR-42-DN300	320-328	315	478

- Reparaciones permanentes de tuberías de fundición, acero y fibrocemento de forma rápida y segura.
- Rango de diámetro: DN-80 / DN-300.
- Presión de trabajo:
 - PN-16: de DN80 a DN200.
 - PN-10: DN250 y DN300.
- Fundición nodular GGG-50.
- Revestimiento EPOXI de 250 µ de media.
- Tornillería con recubrimiento GEOMET y juntas de goma EPDM.

- Cast iron, steel and AC permanent pipe repairs quickly and safely.
- Diameter range: DN-80 / DN-300.
- Operating pressure:
 - PN-16: from DN80 to DN200.
 - PN-10: DN250 and DN300.
- GGG-50 nodular cast iron.
- 250µ EPOXY coating on average.
- Equipped with GEOMET coated bolts, nuts and washers, and EPDM rubber seals.

UR-cast
Water Fittings

www.ur-cast.com
Tfno: (+34) 945 200 466 - Fax: (+34) 945 249 867
C/ Urartea nº 15-17, pab. 6-10, P. I. ALI GOBEO / 01010 VITORIA-GASTEIZ / ÁLAVA (Spain)